


ALUMINUM GEARED CONTINUOUS HINGES

FULL MORTISE

Specifications


- Available in full mortise and surface mount
- 6063 T6 Aluminum alloy, with interlocking extrusions
- Non-handed design
- 83" or 95" length
- Standard duty with 16 thrust type self-lubricating concealed bearings per hinge
- Heavy duty with 32 thrust type self-lubricating concealed bearings per hinge
- High degree of security
- Anodized aluminum after machining
- Through bolt and machine screws fixing
- Templated hole patterns
- 10 year warranty

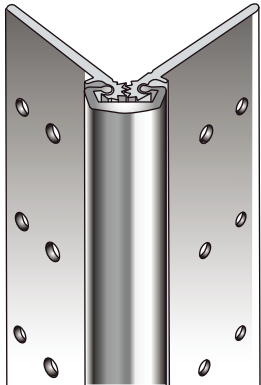

FULL MORTISE

GHMT10

- Mortise type
- Flush mount
- Each hinge leaf has an alignment stop
- 1/4" clearance between door and frame

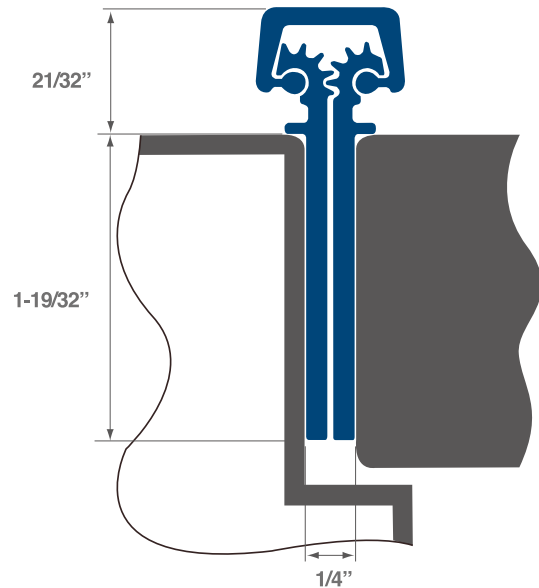

FULL MORTISE

GHMT24

- Mortise type
- 1/16" door offset
- Door edge guard
- 5/16" clearance between door and frame

