


ALUMINUM GEARED CONTINUOUS HINGES

FULL SURFACE

Specifications


- Available in full mortise and surface mount
- 6063 T6 Aluminum alloy, with interlocking extrusions
- Non-handed design
- 83" or 95" length
- Standard duty with 16 thrust type self-lubricating concealed bearings per hinge
- Heavy duty with 32 thrust type self-lubricating concealed bearings per hinge
- High degree of security
- Anodized aluminum after machining
- Through bolt and machine screws fixing
- Templated hole patterns
- 10 year warranty

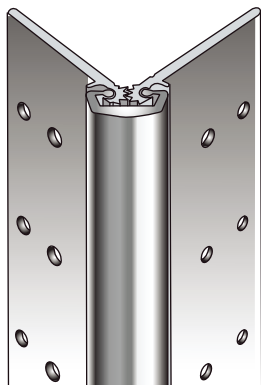

FULL SURFACE

GHFS21

- Full surface continuous hinge
- 1/32" door panel offset
- Tamper resistant removable door leaf cover
- 1/16" clearance between door and frame

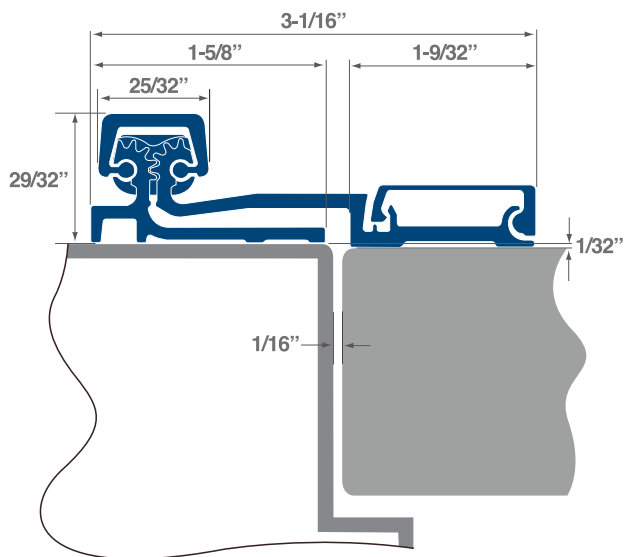

LIMITED FRAME

GHFS30

- Full surface continuous hinge
- For narrow (limited) frame applications
- Tamper resistant removable door leaf cover
- 1/32" clearance between door and frame

