
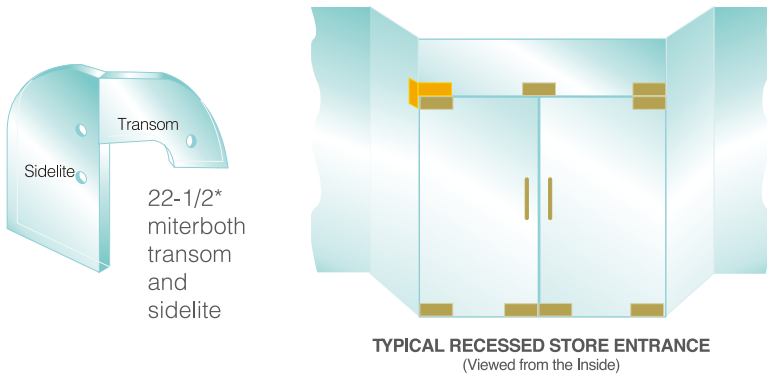


FRAMELESS GLASS DOOR HARDWARE


135° LEFT HAND SIDELITE MOUNTED TRANSOM PATCH

Works with 2-9/16" (65mm) pivot backset and 2-3/4" (70mm) backset

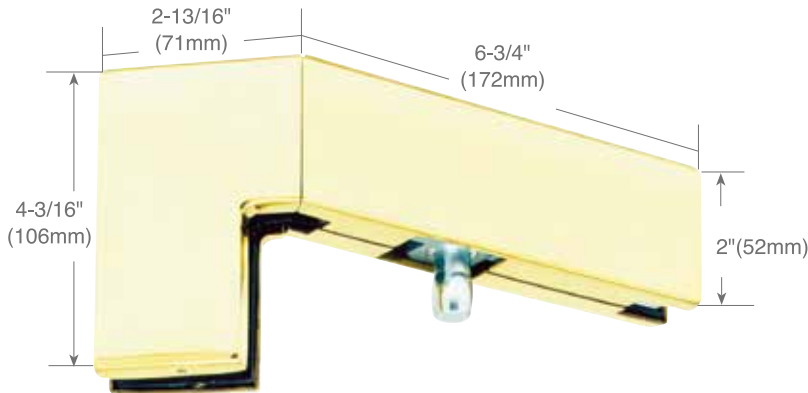

GLASS FABRICATION REQUIRED:


Three 3/4" (19mm) diameter holes and one corner notch ; door is square cut ; sidelite and transom require 22-1/2° miters.



ITEM NO.	FINISH
PF43 - LH - AL	ALUMINUM
PF43 - LH - PB	POLISHED BRASS
PF43 - LH - BS	BRUSHED STAINLESS
PF43 - LH - PS	POLISHED STAINLESS


135° RIGHT HAND SIDELITE MOUNTED TRANSOM PATCH

Works with 2-9/16" (65mm) pivot backset and 2-3/4" (70mm) backset

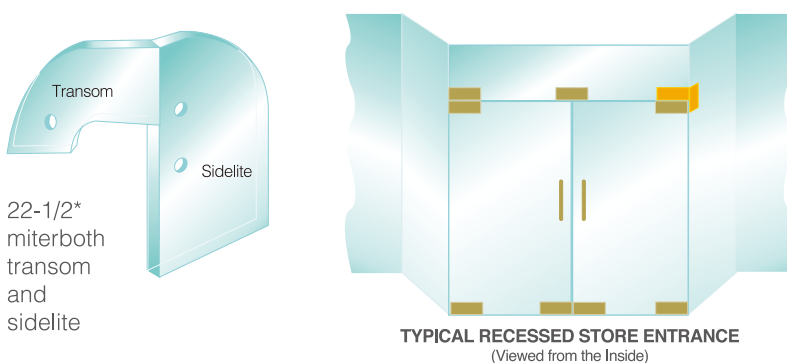

GLASS FABRICATION REQUIRED:

Three 3/4" (19mm) diameter holes and one corner notch ; door is square cut ; sidelite and transom require 22-1/2° miters.



ITEM NO.	FINISH
PF43 - RH - AL	ALUMINUM
PF43 - RH - PB	POLISHED BRASS
PF43 - RH - BS	BRUSHED STAINLESS
PF43 - RH - PS	POLISHED STAINLESS