
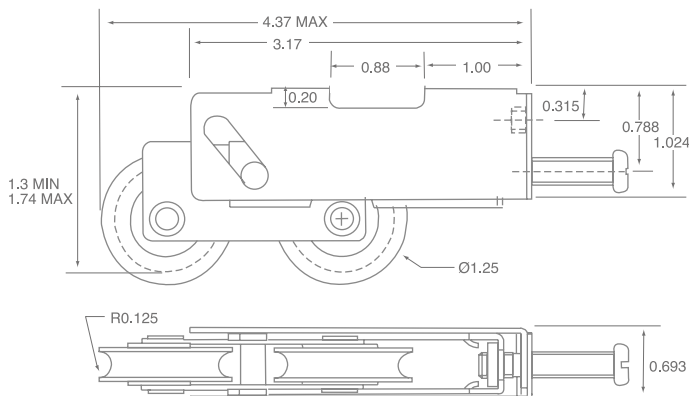


# END-ADJUST TANDEM ROLLER 5100 SERIES

## 5102 END ADJUST ROLLER

Notched to accommodate weld spatter in vinyl applications  
Utilizes 1/4"-20 screw for mounting  
Load rated to 125 lbs per roller  
Available with other wheel sizes and materials

| WHEEL \ CASE | PART NUMBER |
|--------------|-------------|
| steel        | 5102924     |
| Stainless    | 5102925     |

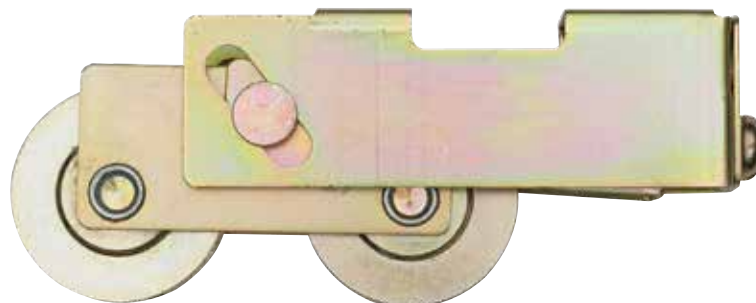

## PRECISION BEARING COMMERCIAL GRADE ADJUSTABLE ROLLER

### GENERAL DESCRIPTION

Precision Bearing end adjust heavy duty commercial grade tandem rollers for sliding glass doors. Heavy gauge housing and sealed precision bearing wheels for heavy load capacity. Height adjustment mechanism can be operated with a philipps screwdriver. Mounting tabs and hole location conform to general industry practice.

### MATERIAL AND FINISH

**HOUSING :** Heavy gauge Stainless steel

**WHEEL :** Stainless steel



**BEARING AND RACE :** Sealed Precision Bearing

**LOAD CAPACITY :** Up to 250 lbs.

**HEIGHT ADJUSTMENT RANGE :** Up to 0.77"

**ADJUSTMENT TYPE :** Ramped slot Screw driven

**ERTIFICATION :** Exceeds AAMA 906-96 requirements for cycle life and load capacity

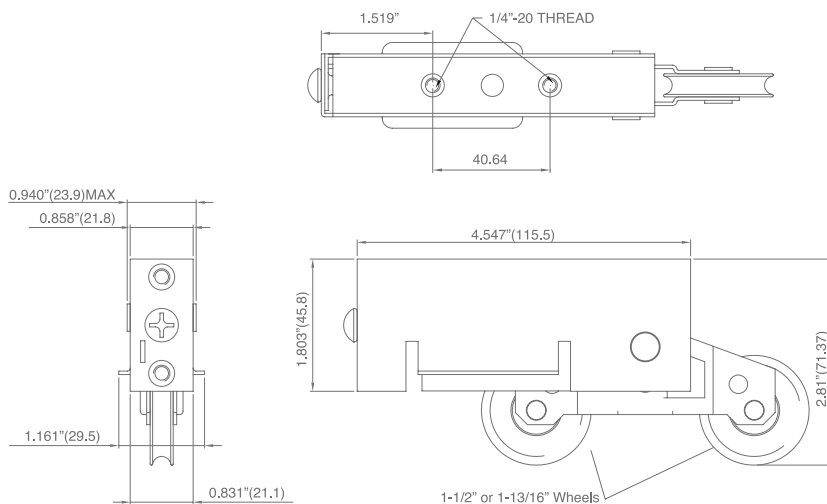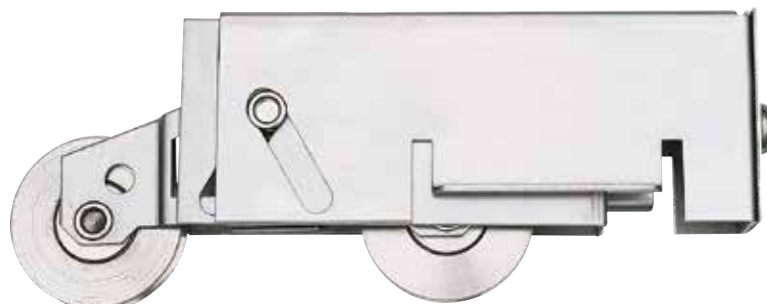

Wheel size 1.5" diameter or 1-13/16" diameter

| WHEEL \ CASE | Wheel Size | PART NUMBER |
|--------------|------------|-------------|
| Stainless    | 1-1/2"     | 5400925     |
| Stainless    | 1-13/16"   | 5433925     |