


# SHOWER DOOR POLYCARBONATES


## EDGE WIPES

Edge Wipes can be used for inswing or outswinging doors. The two different sizes allow the installer a choice of seal lengths. Use as is, or simply trim the legs as necessary. Adhere 5/16" (8 mm) rigid base to glass edge.

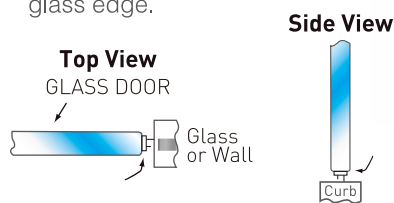


**PRODUCT CODE** **GLASS SIZE**

EWDFS



## EDGE WIPES


Bottom Rail is snapped onto the fixed panel running inline with the door.



**PRODUCT CODE** **GLASS SIZE**

EW10BR38

10mm




## 'V' SEAL-DUAL DUROMETER

This is used only on doors swinging one way to seal gaps from 3/16" (5 mm) to 1/4" (6 mm). Adhere 5/16" (8 mm) rigid leg to glass edge. Door closes into soft vinyl leg.


**PRODUCT CODE** **GLASS SIZE**

EWVS




### Top Views

#### 'V' Seal Mounted To Glass

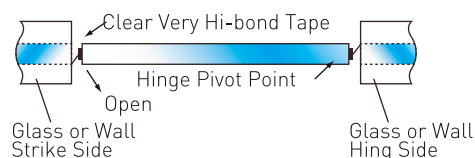


#### 'V' Seal Mounted To Wall

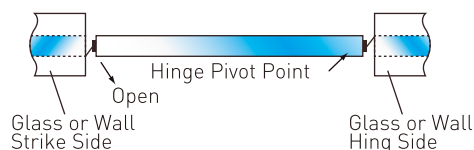

#### One Way Outswing Doors

## 'L' SEALS


"They should be used on outswing doors only, and can be used on both hinge and strike side jambs. The soft leg of the "L" will act as a seal, allowing for a quiet and forgiving door closure."

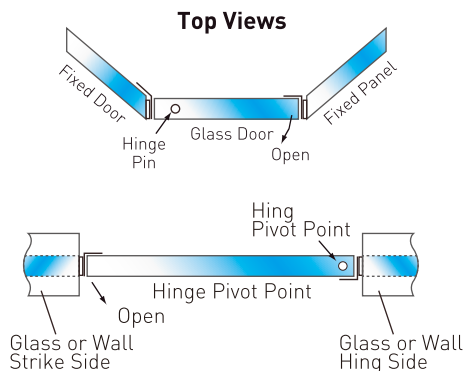

**PRODUCT CODE** **GLASS SIZE**

MEW10-90

10mm




## BULB SEAL


Bulb Seal can be used on inswing or outswinging doors.

### Top Views

#### Bulb Seal Mounted To Glass

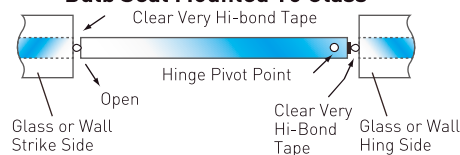

#### Bulb Seal Mounted To Wall

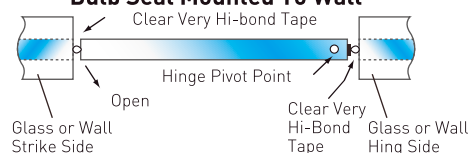

**PRODUCT CODE** **GLASS SIZE**

EW10DD

